


Remote GS001R

User Manual

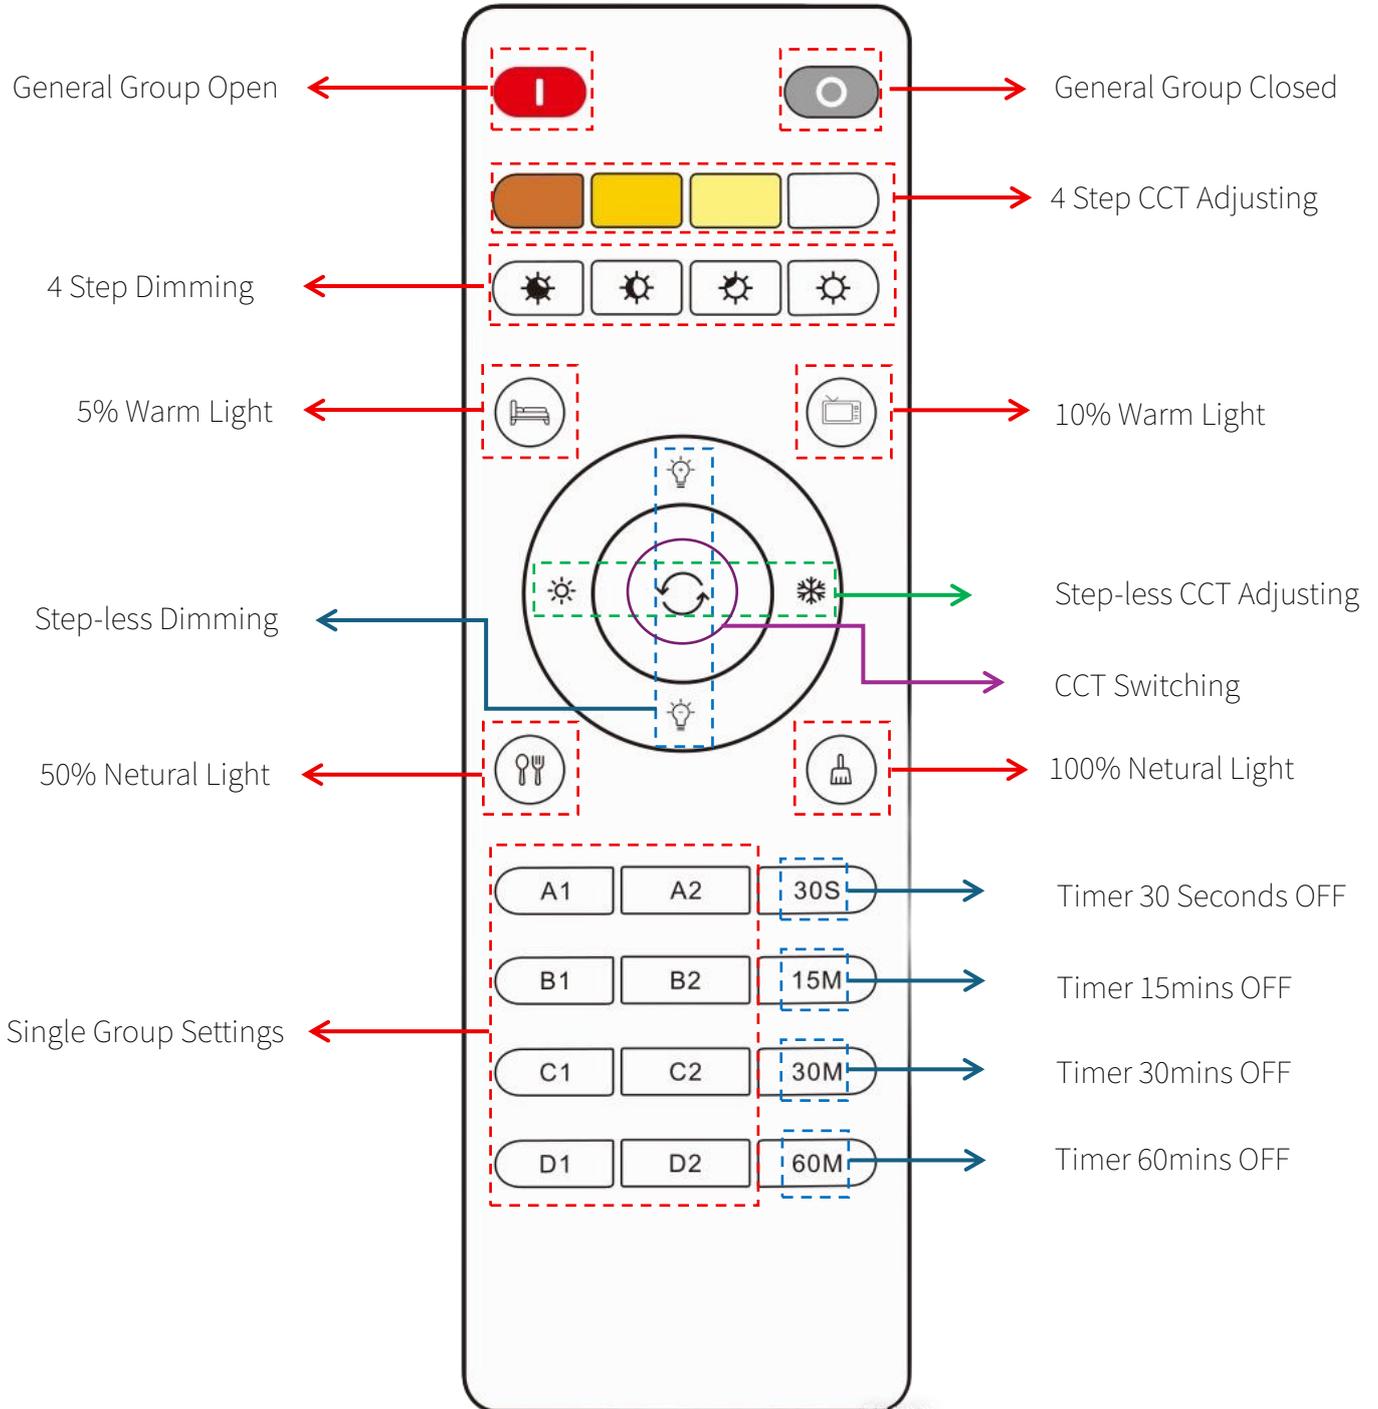

Dimming and CCT Adjusting Function Picture 1

Remote GS001R:

Model: GS001R

Color: White

Material: Plastic

Battery: AAA*2 Endurance Time about 2 years

Communication Protocol: RF-2.4G

Controllable Distance: \leq 30 Meters

Function: Single Group Control, General Group Control, Dimming and CCT Adjusting, 4 Preset Scene Modes, Timer-off Modes.

Operation Instruction

1. Single Group Control

1.1 Single Group Open Key

There are four single group open keys, they are A1, B1, C1, D1.

Function No.1

–To pair codes: Turn on the lights you want to bind to Group A, then long press A1 key to pair codes in 5 seconds, the lights will blink one time and finish pairing. (Similarly, for Group B1/C1/D1)

Function No.2

–To turn on the lights: Click A1 key, all lights in group A1 are turn on. (Similarly,for Group B1/C1/D1)

1.2 Single Group Closed Key

There are four single group closed keys, they are A2, B2, C2, D2.

Function No.1

–To clear codes: Turn on the lights you want to unbind, then click A2 key five times consecutively in 5 seconds, the lights will blink one time means clear code completed. (Similarly, for Group B2/C2/D2)

Function No.2

–To turn off the light: Click A2 key, all lights in group A2 are turn off. (Similarly, for Group B2/C2/D2)

2. General Group Control

2.1 “” key means General Group Open

–Turn on the lights, long press “” key to pair codes in 5 seconds, the lights will blink one time and finish pairing. Meanwhile, they will be automatically grouped into group A1. (✘Noticed, normally, we do not use this button for grouping; instead, we use A1 or B1 or C1 or D1 for that.)

–Click “” , all lights in different groups are turn on.

2.2 “” key means General Group Closed

–Turn on the light, click “” key five times consecutively in 5 seconds, the light will blink one time and clear code completed. (✘If you use this button to clear code, all lights in different

groups will be clear code together.)

-Click “”, all lights in different groups are turn off.

3. About Timer-off Functions(30s/15mins/30mins/60mins)

First, press one of the single group open buttons(A1/B1/C1/D1). Second, press one of the timer-off function buttons(30S/15mins/30mins/60mins). Then, the light flickering indicates that it has entered the timer-off mode. (✘After pressing the timer function button, do not perform any other operations on the remote control, otherwise, the selected timer function will be automatically canceled.)

4.Scene & Dimming and CCT Adjusting Functions

The functions of GS001R as picture 1

4.1 Four frequently used preset scenarios as follow:

Key	Preset Scenarios
	Rest mode→5% Warm light
	Entertainment mode→10% Warm light
	Dinning mode→50% Neutral light
	Cleaning mode→100% Neutral light

4.2 Dimming and CCT Adjusting Functions as follow:

Key	Dimming and CCT
	Click to increase brightness by one level or long press to increase brightness
	Click to decrease brightness by one level or long press to decrease brightness
	Click to decrease CCT by one level or long press to decrease CCT
	Click to increase CCT by one level or long press to increase CCT
	Click to switch the warm light>neutral light> white light (Brightness keep same)

Note: One remote can control countless lights. A single light can be paired with up to three remote controls.