

GLORY - SMART WIRELESS SERIES


GLORY SMART

Smart Wireless Series

🏠 Indoor & Outdoor 🌿



Instant Bluetooth Pairing

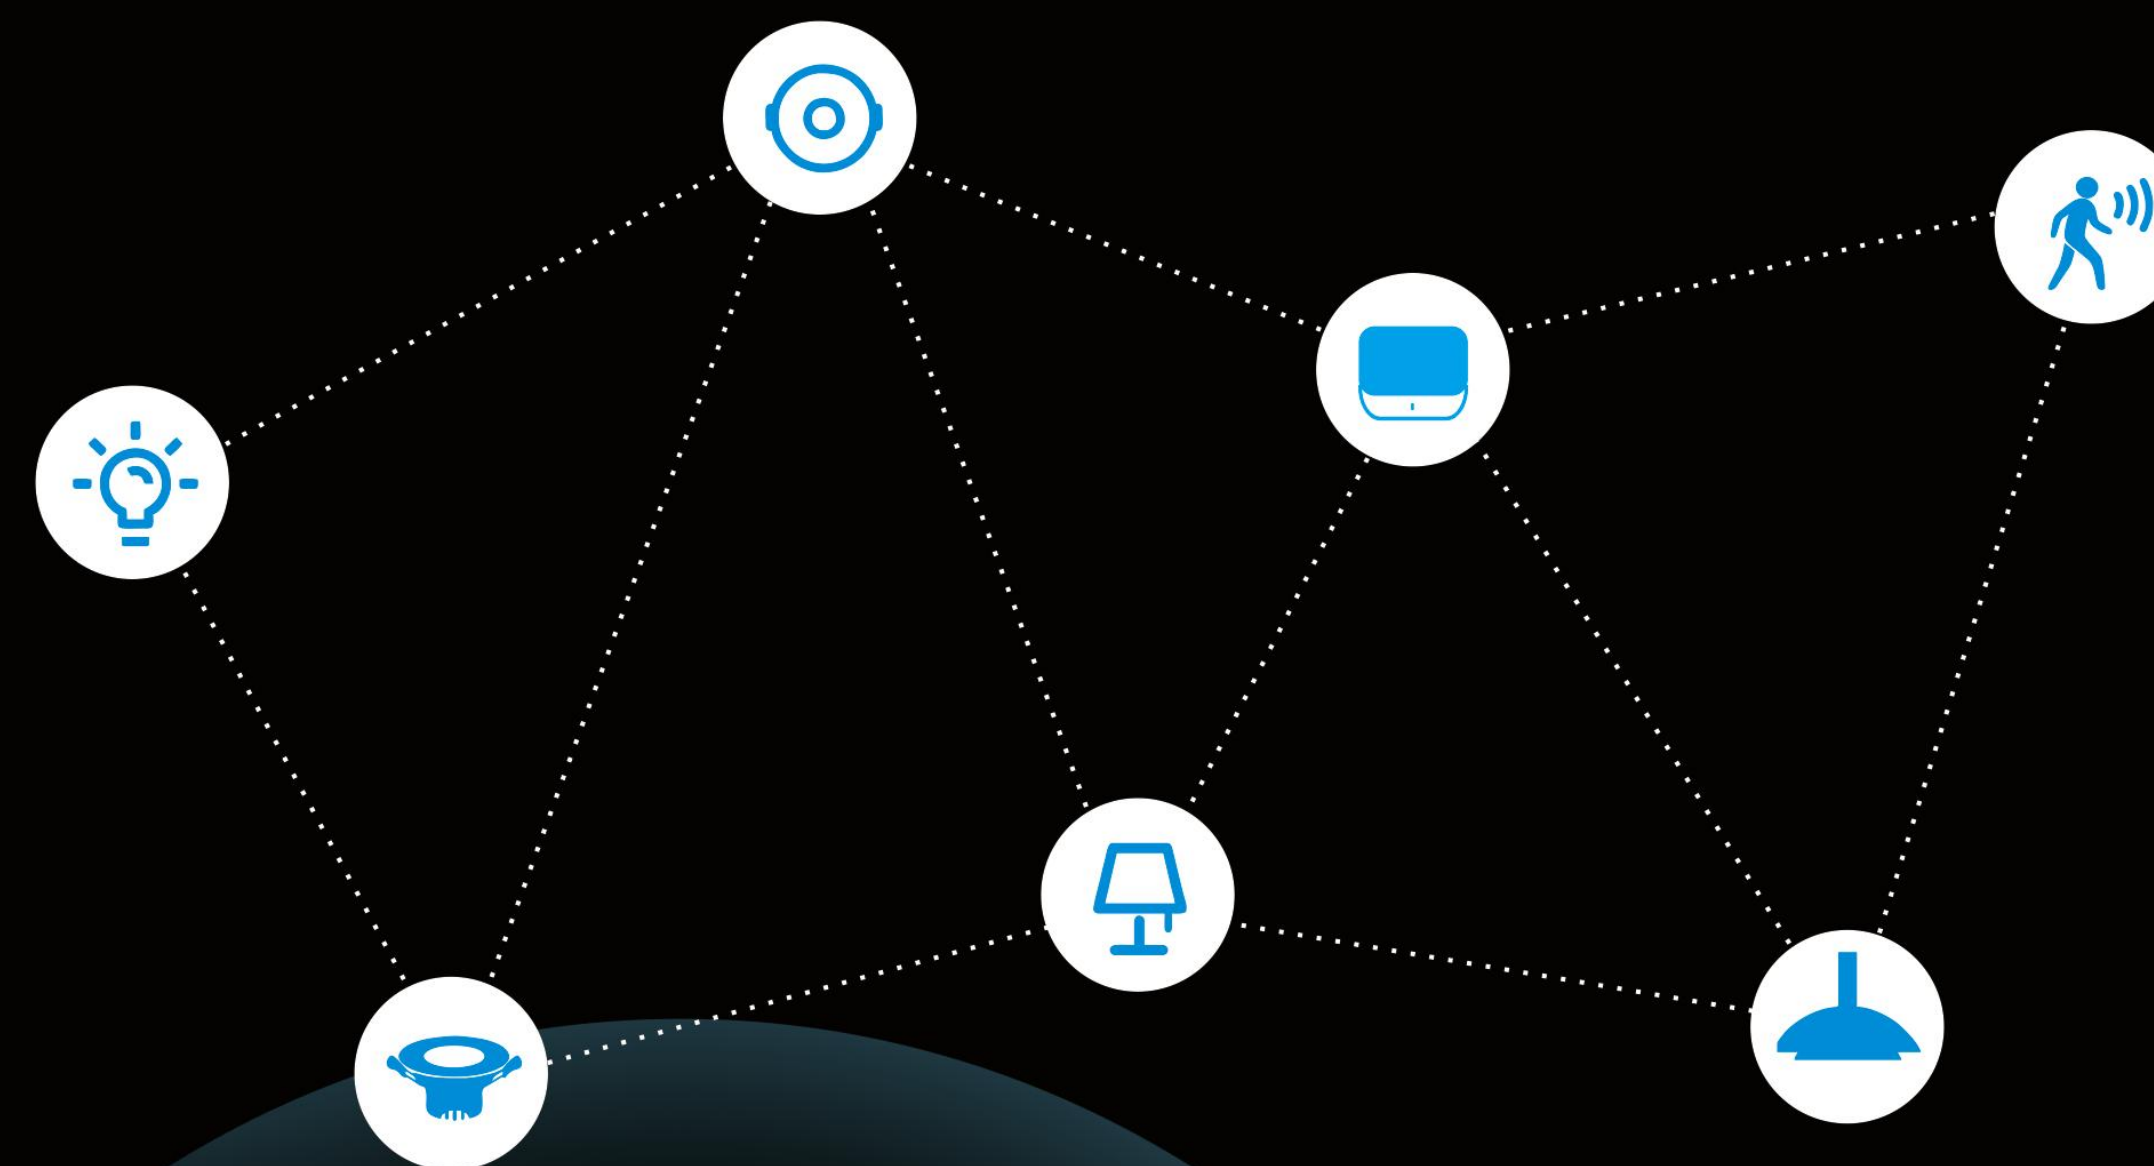

1s

 1-Second
Fast Connection

 Multiple Control Options




Remote



Panel



Speaker

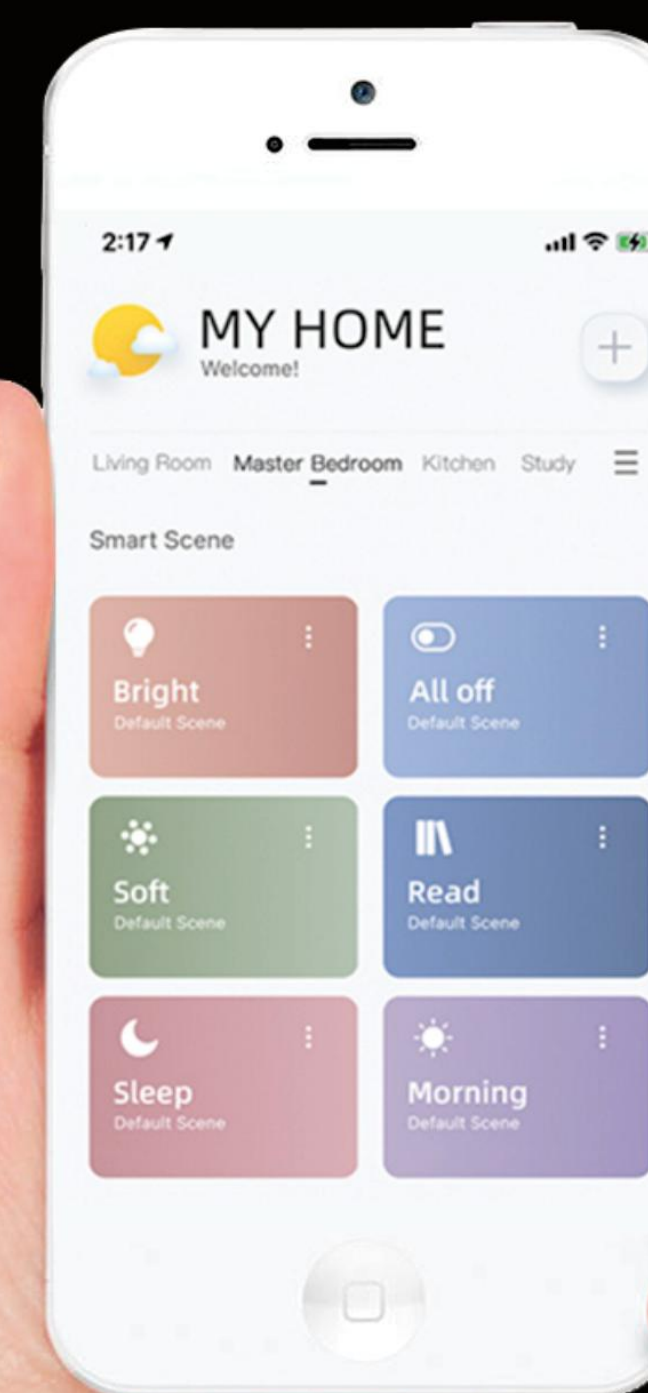

System by
GLORY
SMART

GLORY - SMART WIRELESS SERIES

Spot light

Magnetic light

Outdoor
Spot light

Strip light

Strip light

Panel


Outdoor
garden light

Smart speaker

Glory APP



Wireless Dimming & Tunable CCT
Constant Current Driver

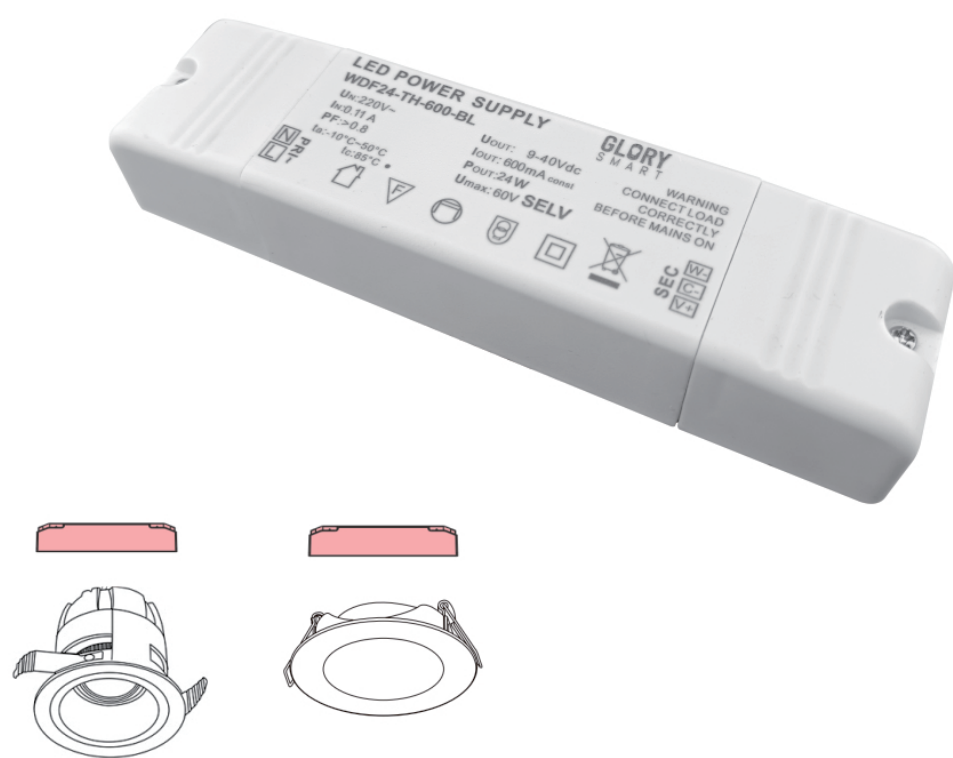

 Dimming Depth
0.1%~100%

 **Bluetooth Mesh**



-  SCP
-  OLP
-  OVP
-  OTP

产品型号 Product Model	额定功率 Output Power	输入电压 Input Voltage	输出电流 Output Current	输出电压 Output Voltage	功率因数 PF	赫兹 Hz	调光类型 Dimming Type
WDF6H-GRBT	6W	AC200-240V	150mA	DC9~40V	≥0.9	50/60Hz	S/CW/RGBCW
WDF10H-GRBT	10W	AC200-240V	250mA	DC9~40V	≥0.9	50/60Hz	S/CW/RGBCW
WDF15H-GRBT	15W	AC200-240V	350mA	DC9~40V	≥0.9	50/60Hz	S/CW/RGBCW
WDF24H-GRBT	24W	AC200-240V	600mA	DC9~40V	≥0.9	50/60Hz	S/CW/RGBCW
WDF36H-GRBT	36W	AC200-240V	900mA	DC9~40V	≥0.9	50/60Hz	S/CW/RGBCW


No-Load Power	< 1W
PstLM	≤1
SVM	≤0.4

Inrush Current	Cold Start: 4.68A @ 230V, 22.4μs
Surge Immunity	L-N: 1.5kV
Dimming Curve	Logarithmic

Product Dimensions

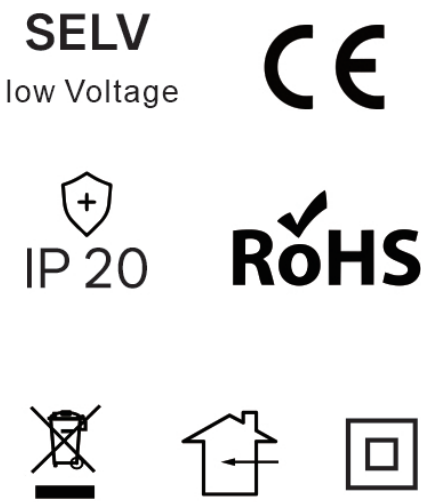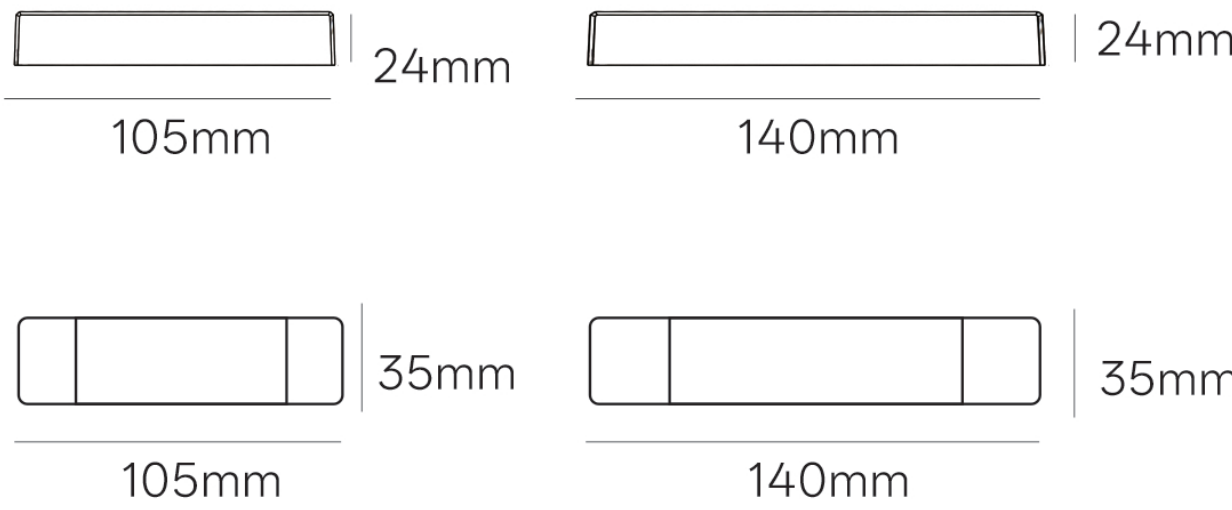

Wireless Dimming & Tunable CCT
Constant Voltage Driver

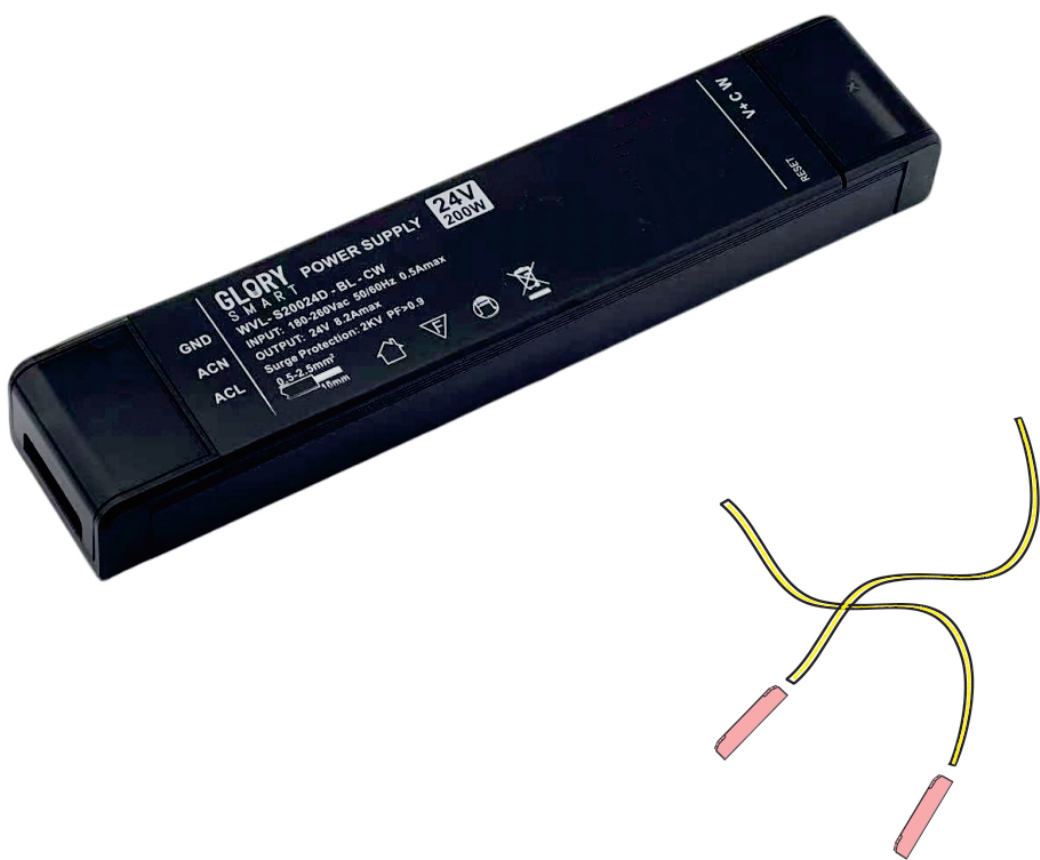


 Dimming Depth
0.1%~100%

 **Bluetooth Mesh**


-  SCP
-  OLP
-  OVP
-  OTP

产品型号 Product model	输出功率 Output power	输入电压 Input voltage	输出电压 Output voltage	输出电流 Output current	调光输出 Dimming output
WDL-S10024D-GRBT	100W	180-260VAC	24VDC	4.1A	S / CW / RGBCW
WDL-S20024D-GRBT	200W	180-260VAC	24VDC	8.2A	S / CW / RGBCW

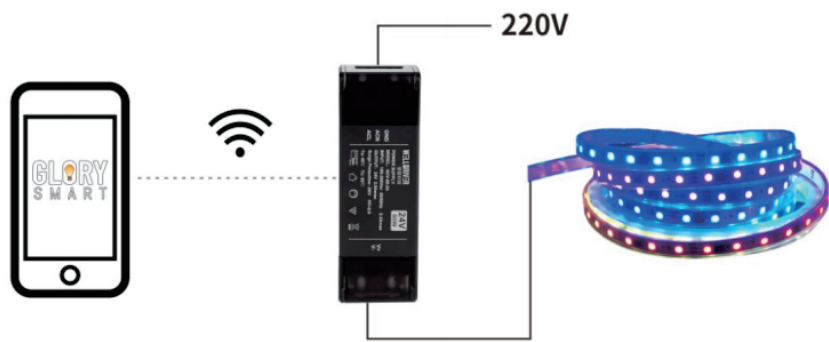

Inrush Current	Cold Start: 4.68A @ 230V, 22.4μs
Surge Immunity	L-N: 1.5kV
Dimming Curve	Logarithmic

Product Dimensions

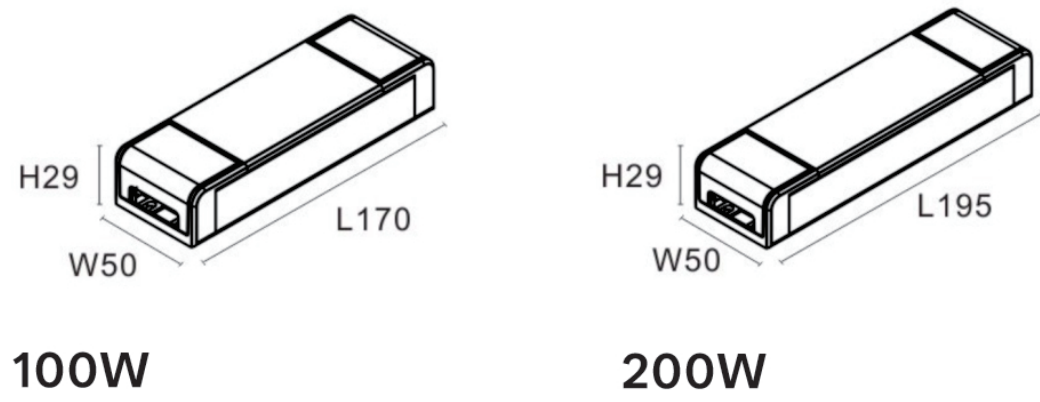

Dimmable & Tunable CCT
Magnetic Track Driver



 Dimming Depth
0.1%~100%

 **Bluetooth Mesh**

 SCP  OLP
 OVP  OTP

产品型号 Product model	输出功率 Output power	输入电压 Input voltage	输出电压 Output voltage	输出电流 Output current	功率因数 Power factor	调光输出 Dimming output
WDMTP10048D-GLORY	100W	180-260VAC	24VDC	4.1A	0.5	S / CW
WDMTP20048D-GLORY	200W	180-260VAC	24VDC	8.2A	0.5	S / CW



Inrush Current	Cold Start: 4.68A @ 230V, 22.4μs
Surge Immunity	L-N: 1.5kV

Product Dimensions




SELV
low Voltage



IP 20

ROHS



	22mm		22mm
230mm		270mm	
	26mm		26mm
230mm		270mm	
100W		200W	

Wireless Gataway



Specifications

Model	SMART HUB S3(Gateway)
Input current	5V
Dimensions	L45.9xW45.9x20.6mm



APP download


GLORY
S M A R T
For IOS User

or



For Android User

Product Introduction

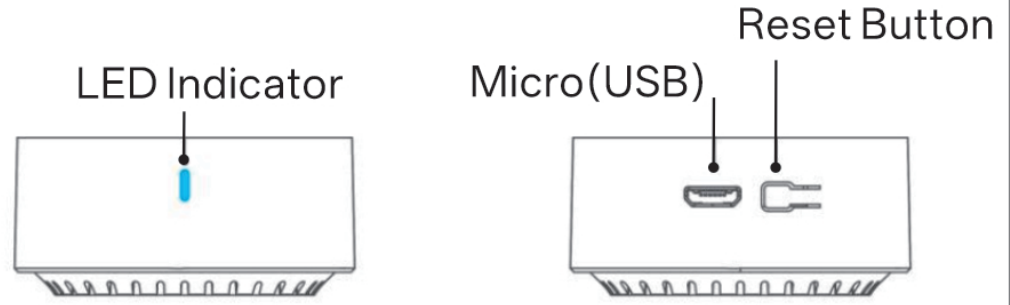

LED Indicator Status

 Fast blinking (5 times/sec)	Device is in Smart Configuration Mode (waiting to be added)
 Intermittent blinking	Device is in AP Configuration Mode (waiting to be added)
 Slow blinking then off	Device is being configured and added to the network
 Slow continuous blinking	Failed to connect to network or connection lost

Operating Conditions



 Preset Scene
Switching

 Multi-Platform
Integration

 Hey Google alexa


Wireless Smart Switch Panel



Specifications

Model	4-Gang / 6-Gang Wireless Panel
Input Voltage	180VAC-260VAC

Pairing Instructions

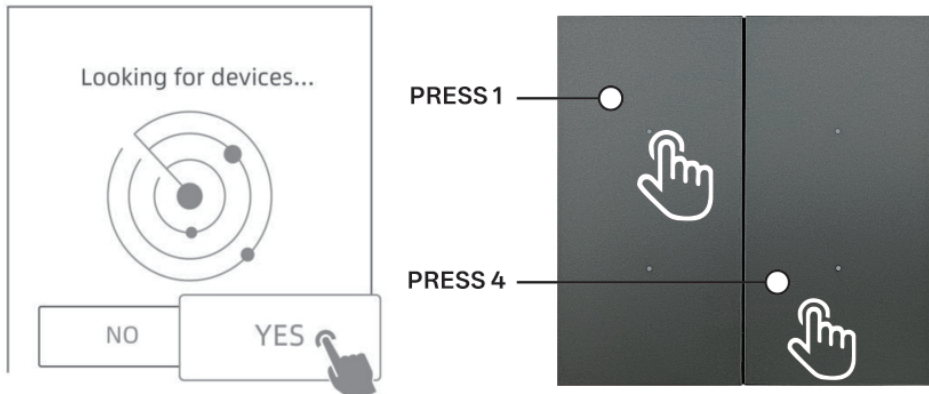

Enable Bluetooth on your smartphone and open the App.
Press and hold the 1 and 4 buttons on the panel simultaneously.
Follow the in-App prompts to add the device.
You can then control lighting fixtures via preset scenes.

App Download




For IOS User

or



For Android User


Wiring Diagram

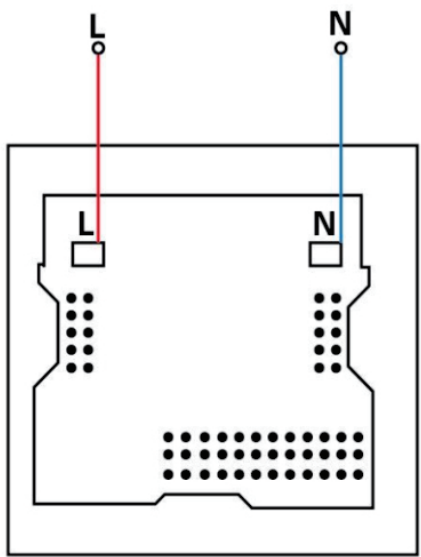

SELV
LOW VOLTAGE **IP 20**



Product Dimensions

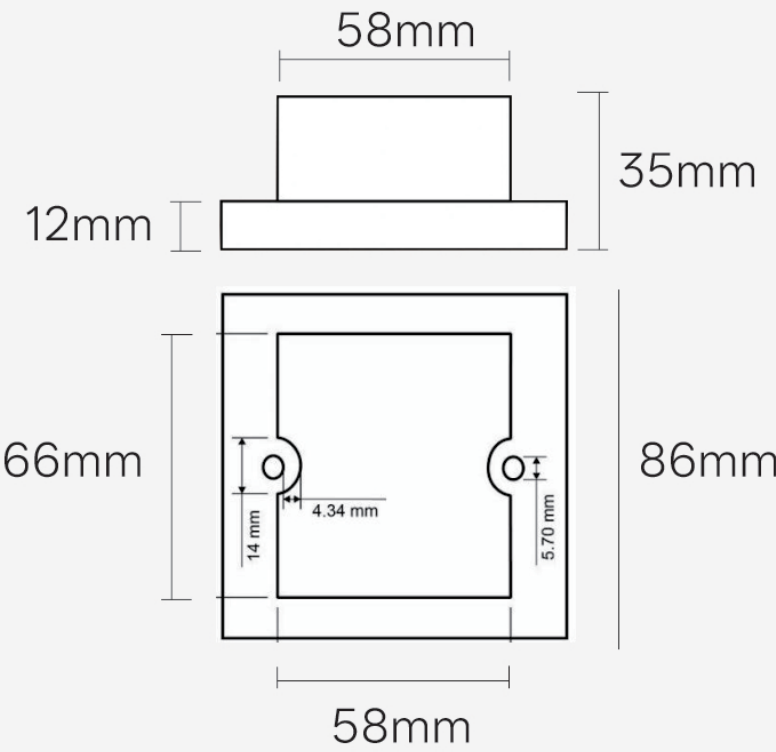


Smart Switch Module



Specifications


Model	Smart Switch Module (PIN)
Input Voltage	AC 220~240V
Dimensions	L47*W47*H18mm

Wiring Diagrams

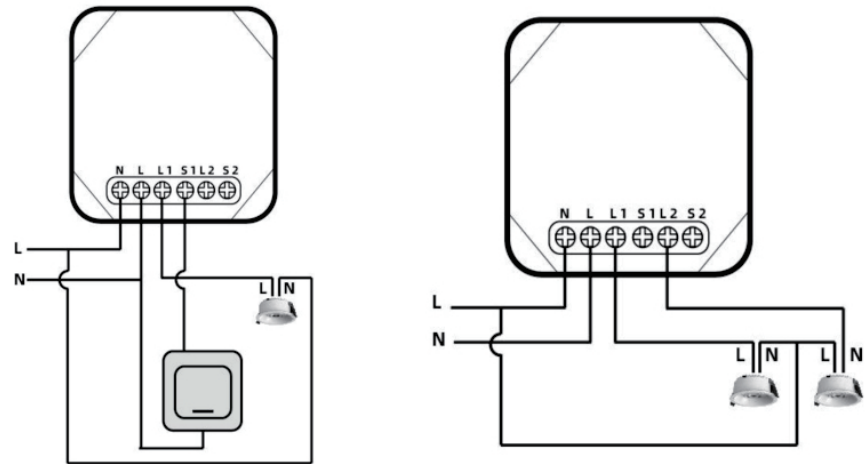

Wiring with External Switch

Wiring for Two Devices

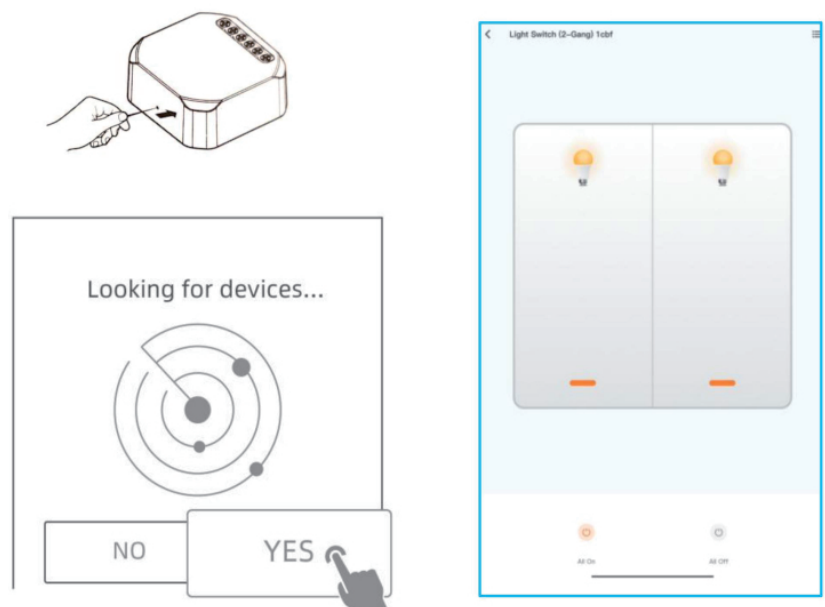

Add the device in the GLORY App.
Control two groups of regular light bulbs via the App.


Sensor




Specifications

Model	BL-SBR-AE24N01
Input Voltage	AC 220~240V
Dimensions	Φ67*H49.4mm
Cutout Size	Φ55mm


Wiring Diagrams

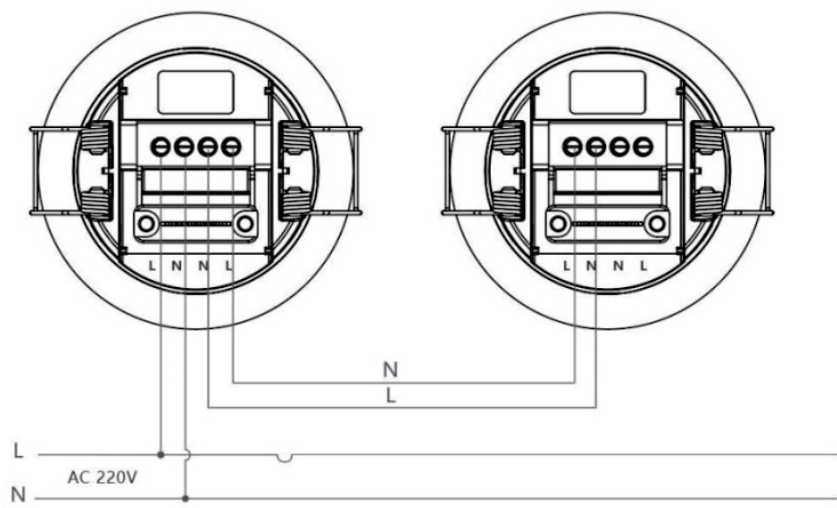

Product Dimensions

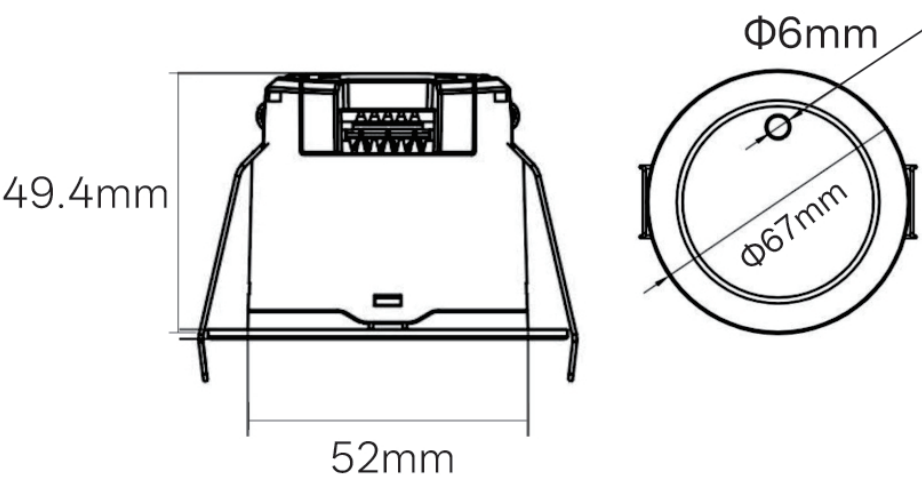


2.4G Remote

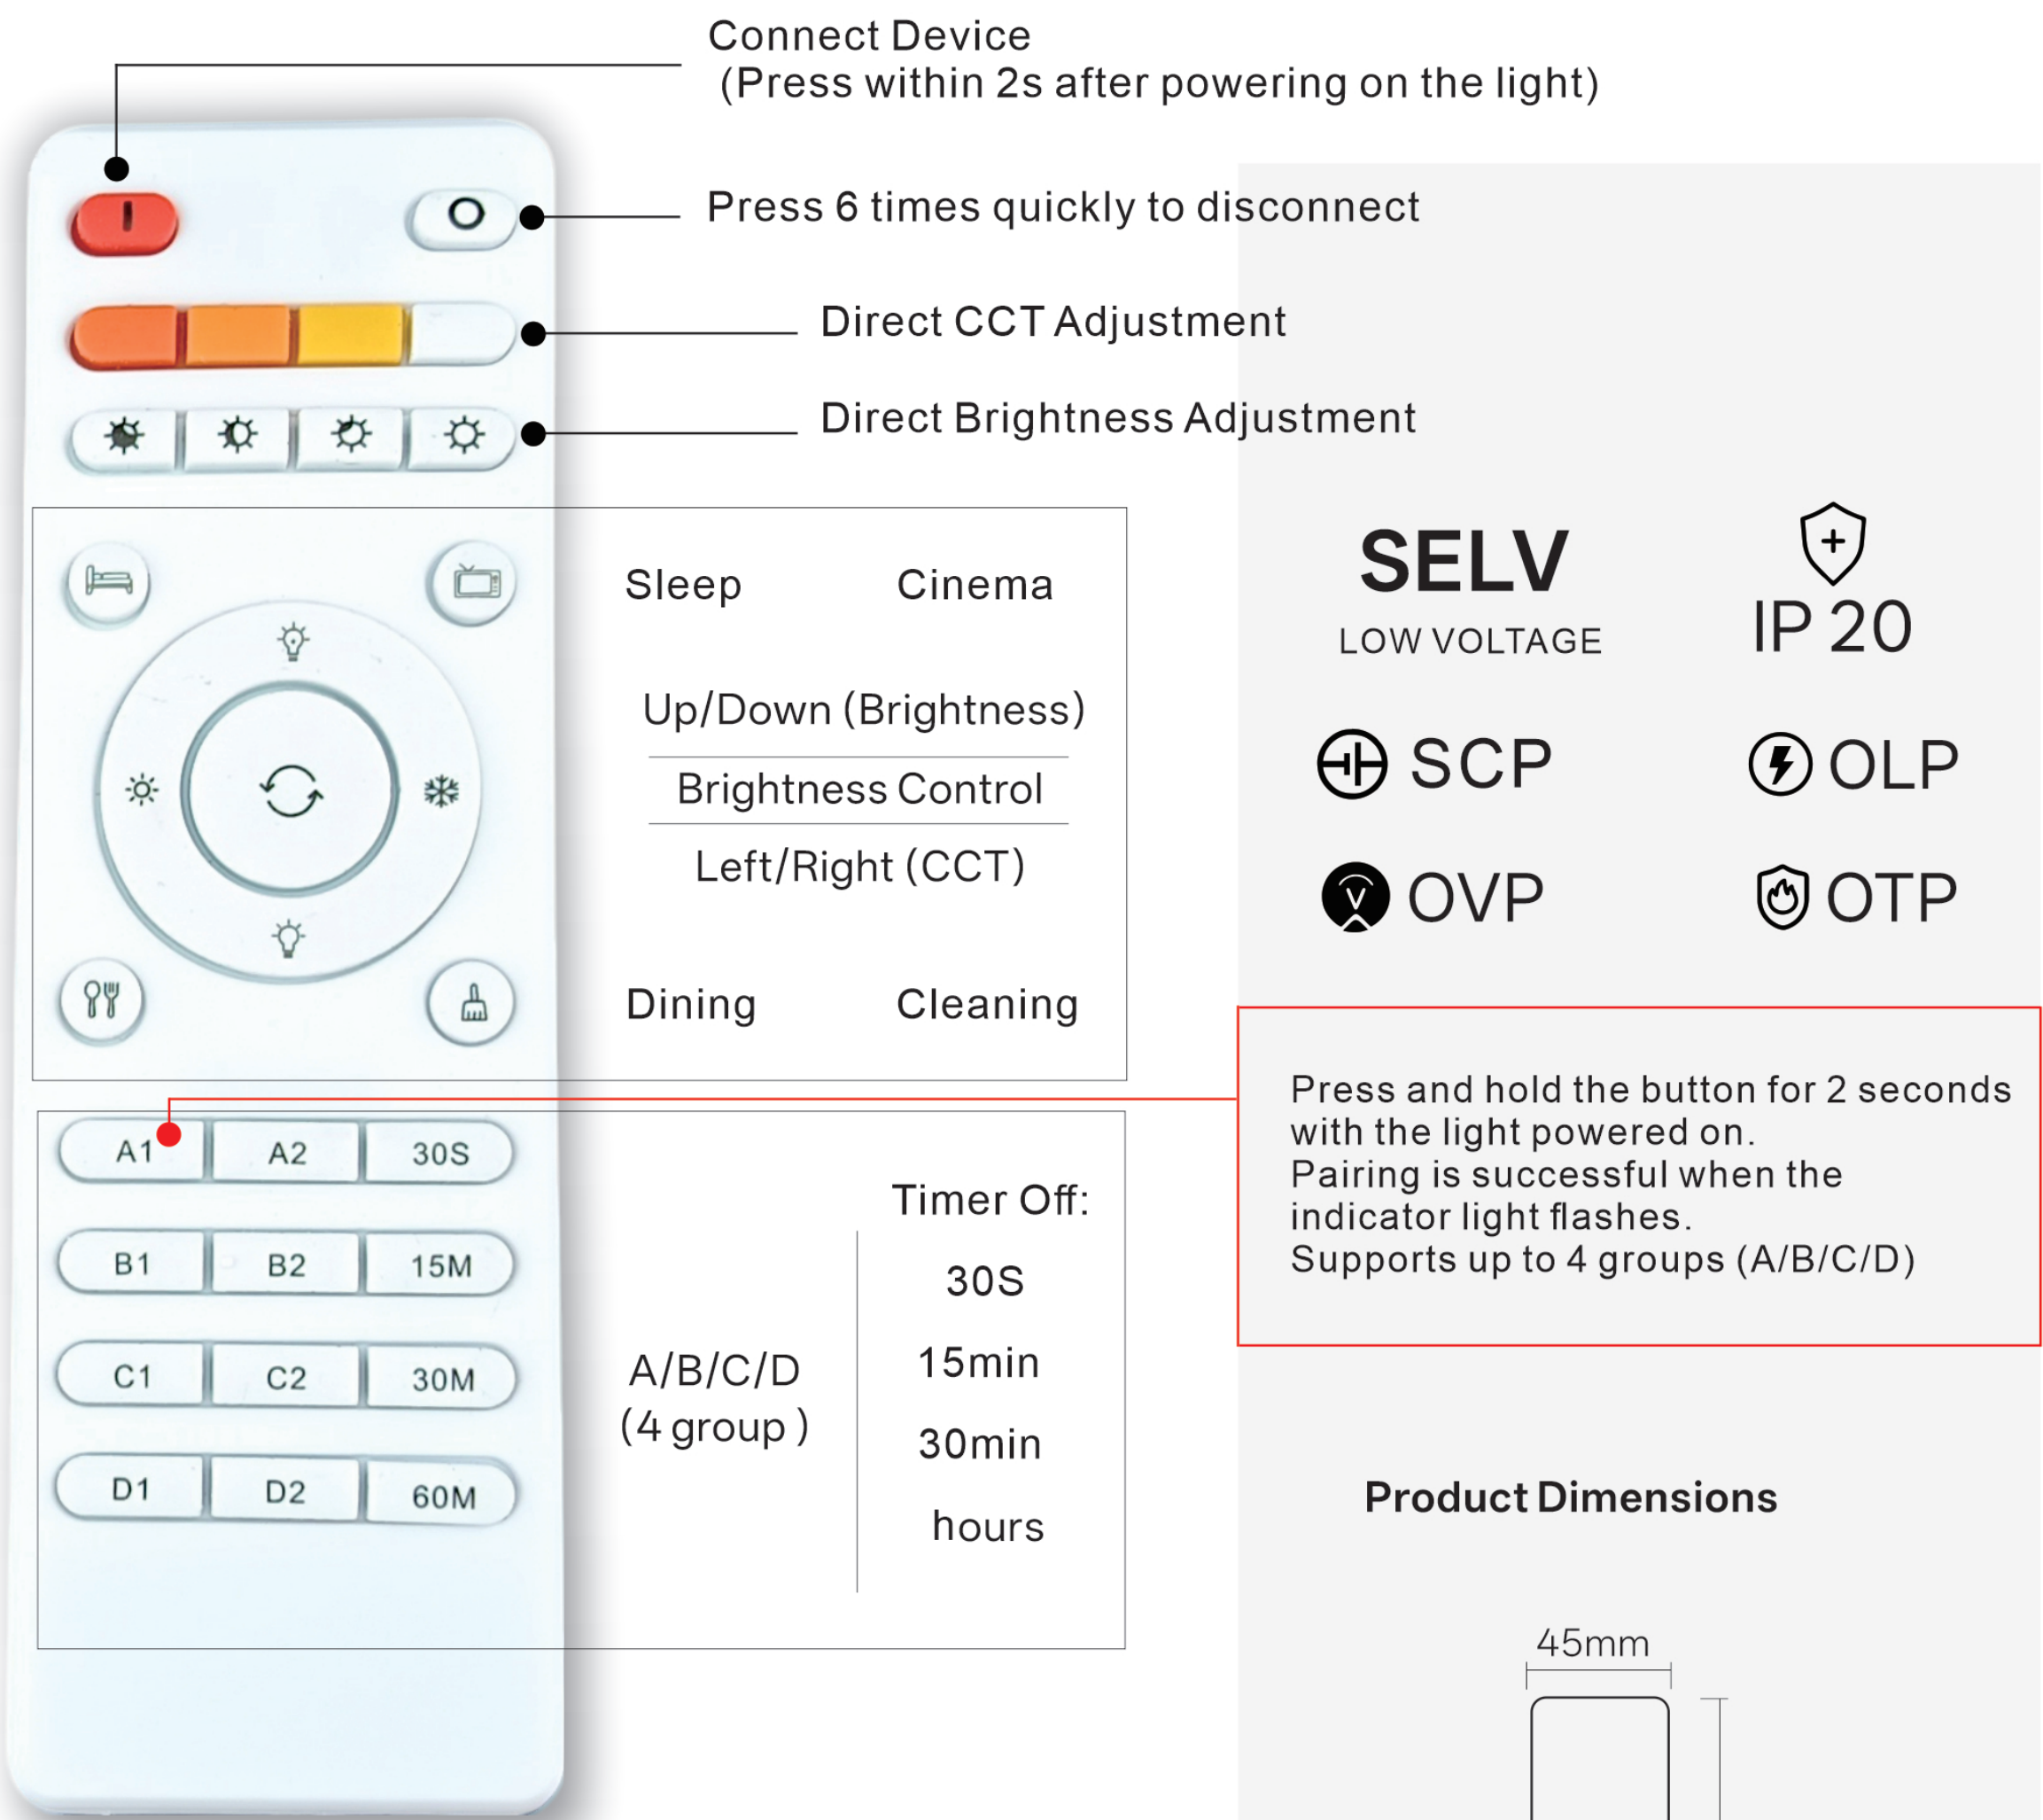

Specifications

Model	GS001R
Power Supply	AAA battery*2
Dimension	L140xW45mm


Product Dimensions

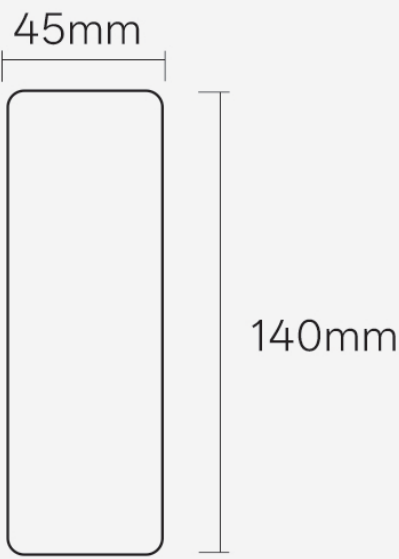


Smart Curtain Motor



Wiring Diagram

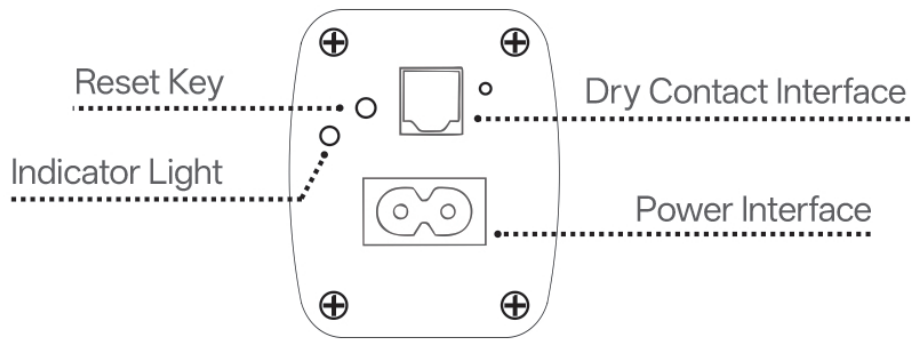


Pairing

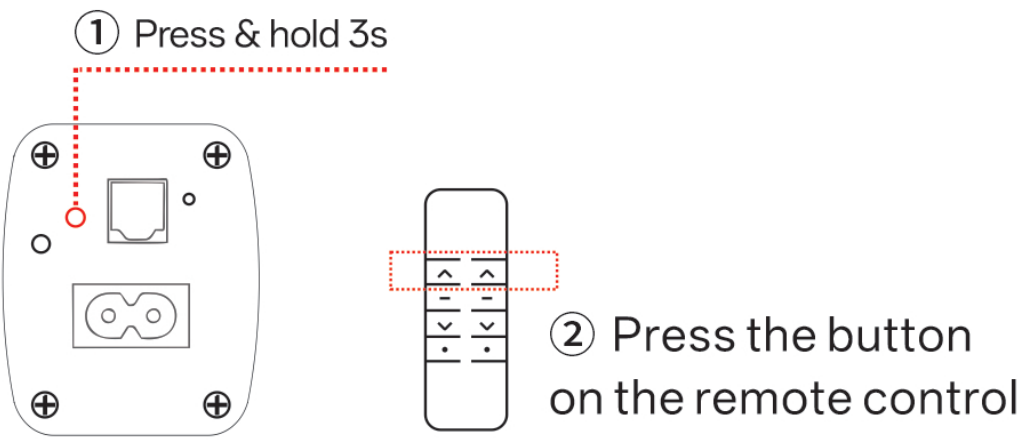

If the indicator light blinks, the pairing is successful.

Remote Deletion & Limit Clearing

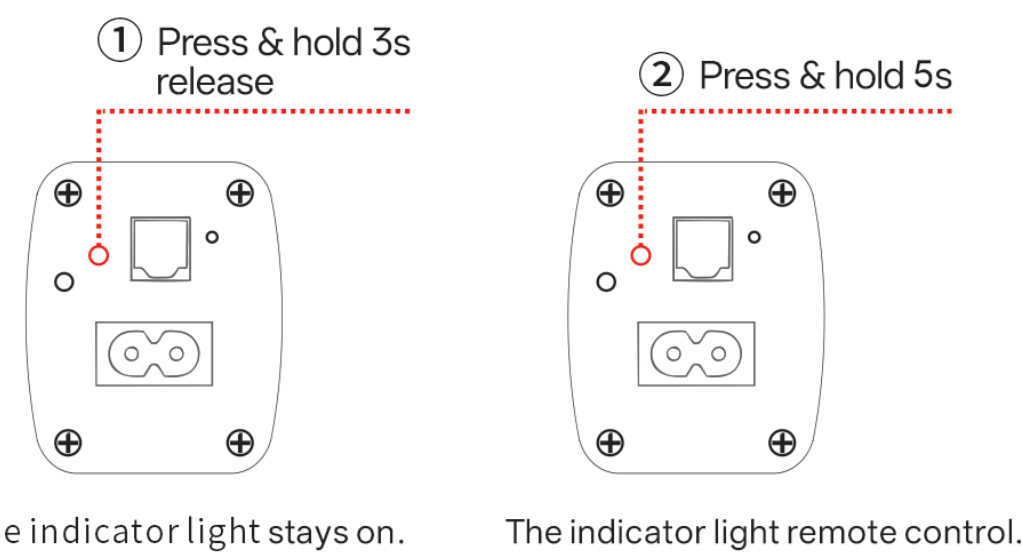

The indicator light stays on.

The indicator light remote control.

App Download

GLORY
S M A R T

For IOS User

or



For Android User

SELV
LOW VOLTAGE IP 20

SCP OLP
OVP OTP

Product Dimensions

