

WDPNH75T4-400/SW

DESCRIPTION


- High Power Factor PF>0.9
- Power Selection & CCT
- Over Voltage Protection
- Short Circuit Protection




电气参数/Electronic

参数/Parameter	说明/Conditions	Min	Nom	Max	Unit
输入电压范围 Input Voltage Range		180		265	Vac
输入电压频率 Input Frequency			50/60		Hz
输出功率 Output Power(Pout)				75	W
输入电流 Input Current(Iin)	25°C,Nominal Input@220Vac		416		mA
输出电压 Output Voltage(Vout)		120	190	200	V
输出电流Output Current(Iout)		320/350/370/400			mA
效率/Efficiency	Full Load		94		%
启动延时 Start-up Delay					ms
功率因数 Power Factor	Full Load	0.9			
谐波总量/THD	Full Load			15	%
色温切换/CCT	拨动开关切换 Toggle Switch	three gears			
保护/Protection	过压保护 Over-voltage Protection	自动恢复/Auto recovery			
	开路保护 Open-circuit Protection		240		V
	短路保护 Short-circuit Protection	自动恢复/Auto recovery			
工作温度 External Operating Temperature		-20		+50	℃
储存温度 Storage Temperature Range		-40		+75	℃
工作湿度 Operating Humidity Range		10		90	%RH
输出电流设置 Output Current Setting	输出电流 Output Current	1	2		
	320mA	OFF	OFF		
	350mA	ON	OFF		
	370mA	OFF	ON		
	400mA	ON	ON		

产品标签/Product labels

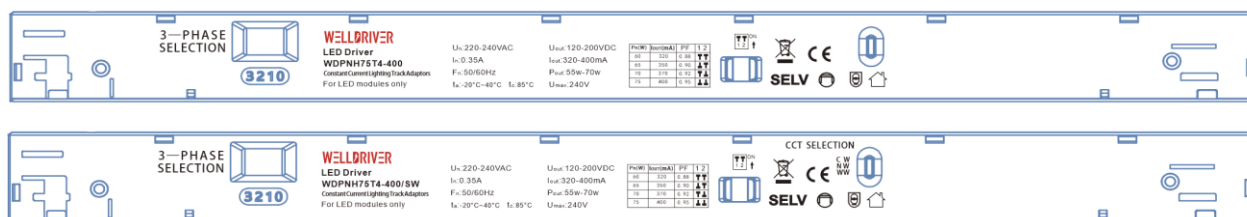

产品尺寸/Dimensions (mm)

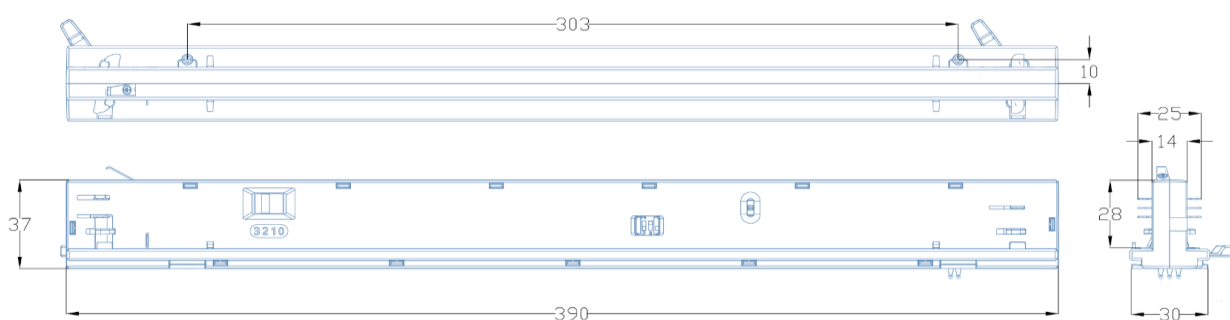

配套灯具尺寸/Matching luminaire dimensions(mm)

